

BOAR SERIES ROCK DRILLS



SALES - HIRE - SERVICE

The “BOAR” has a lightweight piston with large diameter, powerful rotation mechanism and flushing, assuring successful drilling output, even when drilling in poor rock and with low air pressure operation.

BOAR SERIES ROCK DRILLS - TECHNICAL SPECIFICATIONS

Model	Boar	Boar Max	Boar Max Plus
Part Number	DU-9-307-01-L	DU-9-307-05-L	DU-9-307-13-L
Boar	90 mm	90 mm	90 mm
Stroke	45 mm	60 mm	60 mm
Impact Rate	3100/min	2750/min	2650/min
Free Speed	320 RPM	300 RPM	290 RPM
Air Consumption	4.5 m ³ /min @ 6 bar	4.5 m ³ /min @ 6 bar	4.5 m ³ /min @ 6 bar
Operating Air Pressure	5-7 bar	5-7 bar	5-7 bar
Air Connection	1" BSP	1" BSP	1" BSP
Water Connection	1/2" Hose	1/2" Hose	1/2" Hose
Rock Drill Shank	22 x 108 mm Hex	22 x 108 mm Hex	22 x 108 mm Hex
Net Weight	26 kg	26.3 kg	26.5 kg
Length	685 mm	695 mm	695 mm

All models are available with sinker anti-vibration handle. When fitted, measured vibration* is reduced from 23 m/s to 7.5 m/s.

*Vibration levels were recorded @ 6 bar pressure.



EXPERTISE YOU CAN DEPEND ON



📍 NSW

☎ 02 4092 8080

🌐 www.ausdrillingattachments.com.au

REPAIRS AND SERVICE

✉ repairs@ausdrillingattachments.com.au

SALES


✉ ada@ausdrillingattachments.com.au

SALES - HIRE - SERVICE

DT SERIES AIRLEGS - TWO STAGE

Model	Part Number	Retracted Length (A)	Stroke (B)	Extended Length (C)	Weight	Piston Diameter	Material
DT100 AL	DU-64-979-010-DM	1100 mm	1040 mm	2140 mm	13.3 kg	78/65 mm	AL
DT140 AL	DU-64-979-014-DM	1305 mm	1440 mm	2745 mm	15.0 kg	78/65 mm	AL
DT50	DU-64-979-005-DM	875 mm	545 mm	1420 mm	11.9 kg	78/65 mm	AL
DT180 AL	DU-64-979-018-DM	1505 mm	1840 mm	3345 mm	16.6 kg	78/65 mm	AL

Other sizes may be available on request. Please enquire for lead times.

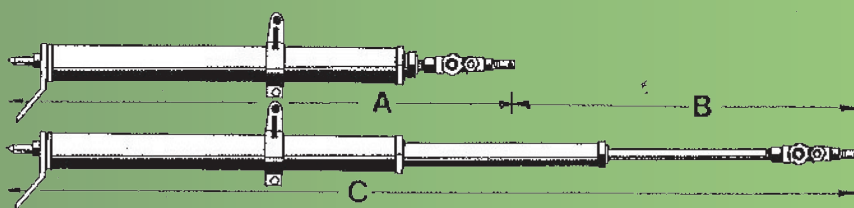

FEATURES:

- Durable construction
- Independent controls - airleg mounted
- Double telescopic design
- Push button retraction - airleg mounted
- Minimum repositioning during drilling

The double telescopic design characteristic incorporating independent control and push-button retraction gives added flexibility and manoeuvrability in all conditions, minimising repositioning of the airleg during hole drilling.

The double telescopic extension allows for long hole drilling in one pass.

A full range of spare parts is available for all equipment.



EXPERTISE YOU CAN DEPEND ON



 NSW

 02 4092 8080

 www.ausdrillingattachments.com.au

REPAIRS AND SERVICE

 repairs@ausdrillingattachments.com.au

SALES

 ada@ausdrillingattachments.com.au

SALES - HIRE - SERVICE

DT SERIES AIRLEGS - TWO STAGE

Model Number	Collapsed Length	Extended Length	Stroke	Rotation
DU-9-307-07-ST-150L - Double Telescopic	1505 mm	3055 mm	1550 mm	Left

Other sizes may be available on request. Please enquire for lead times.

FEATURES:

- Unbeatable combination of both the Boar Series Rockdrill and DT Series Jackleg technologies
- Double telescopic design
- Adjustable drilling speed and feed pressure controls
- Very robust and extremely reliable
- High level of part interchangeability with standard rockdrills and airlegs



EXPERTISE YOU CAN DEPEND ON



 NSW

 02 4092 8080

 www.ausdrillingattachments.com.au

REPAIRS AND SERVICE

 repairs@ausdrillingattachments.com.au

SALES

 ada@ausdrillingattachments.com.au